


# Waet ShineWiFi-F

## Quick Installation Guideline

For more info, please download from <http://server.waet.com>  
 T +86 138-0255-9214 W [www.waet.cn](http://www.waet.cn)  
 E [waetpower@outlook.com](mailto:waetpower@outlook.com)

### Step1. Connection between inverter and ShineWiFi module

Plug cubeWiFi into the WiFi/GPRS port

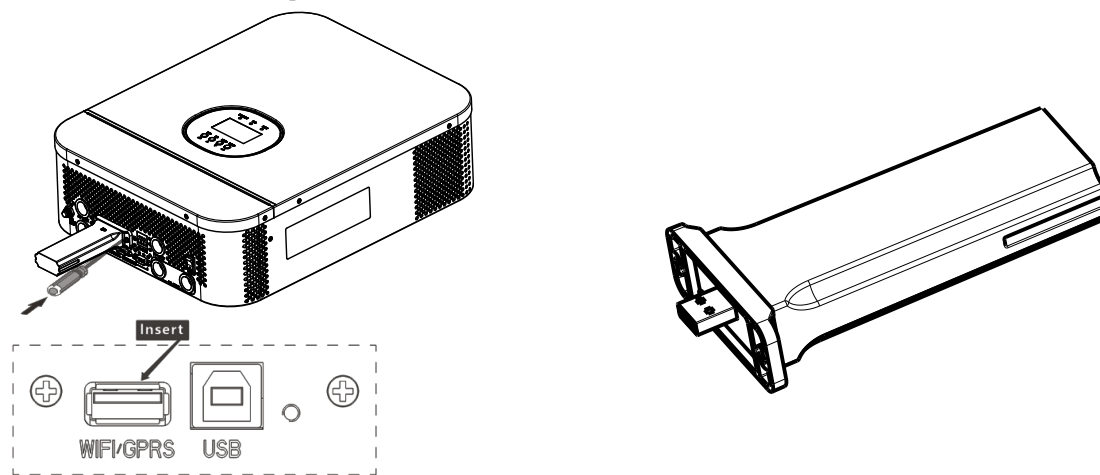

### Step2. Turn on inverter and check ShineWiFi state

After install the ShineWiFi module, turn on the inverter, red LED flashing indicates the inverter and ShineWiFi communication is normal.

### Step3. Registration and adding device



Scan the QR code below to download ShinePhone, also you can search ShinePhone in iOS or Google Play Store, download and install it.

1. Make sure you download the latest version
2. For further information please visit [server.waet.com](http://server.waet.com)


1. Connect your mobile phone to the WiFi of your home router of which the ShineWiFi module will be connected.
  - 1) The router name should consist with English letters and numbers, it does not support special symbols.
  - 2) For safety reason, please use an encrypted wireless network
  - 3) It does not support a public network that uses a secondary authentication.
  - 4) It does not support bridge network.
2. Open ShinePhone APP, click "Register" on login page.
3. Select country and city, then click "Next" enter next page.
 

Note: If you select a wrong country and city, the system time maybe wrong.


LED State	Indication
ALL three LED off	datalogger not connected well with inverter WiFi/GPRS port
Only Red LED flashes	ShineWiFi and inverter communication is OK
Only Green LED flashes	ShineWiFi, inverter and router communication is OK
Only Blue LED flashes	ShineWiFi, inverter, router and ShineServer communication is OK

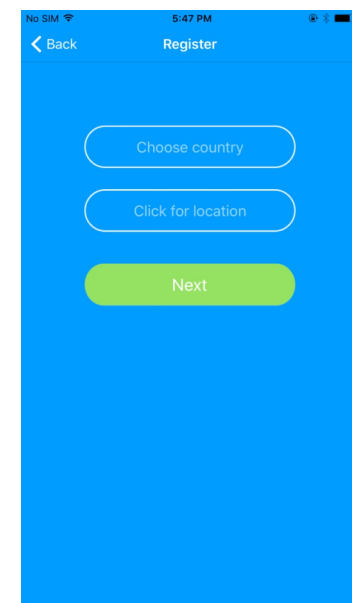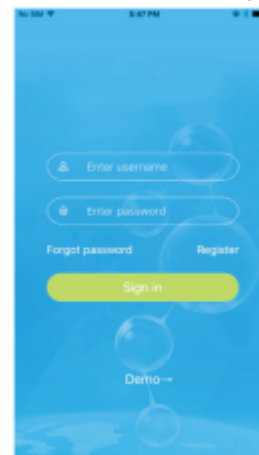

4. Fill out the required information, then click "Next", it will guide you to the "Add datalogger" page.


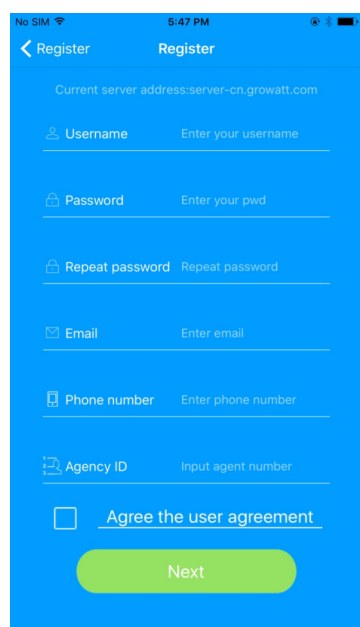


5. Scan or input the ShineWiFi barcode and checkcode, then click "Register", it will move you to the "Set ShineWiFi" page.

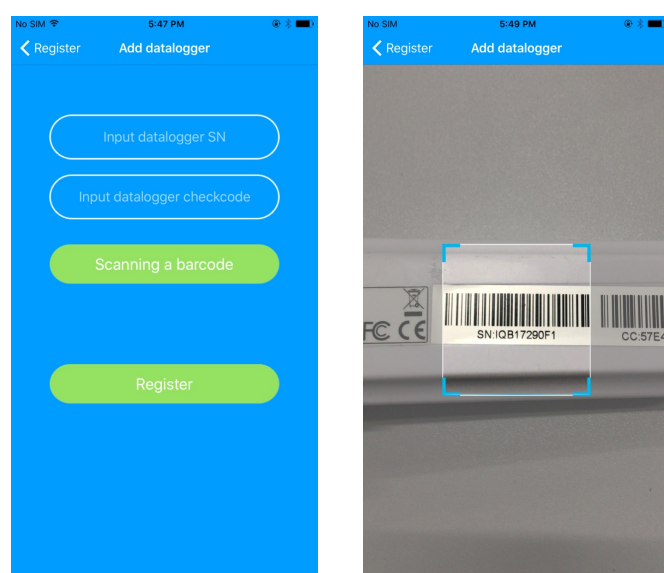


6. Fill out the wifi network and password, then click "Configuration", after successful configuration, a note will pop up "Configured successfully", then it will move to the "my plant" page.
 


Note: There are 3 LEDs on ShineWiFi, only the blue LED flashing indicates the ShineWiFi module is successfully connected to the router and Growatt Shine Server.

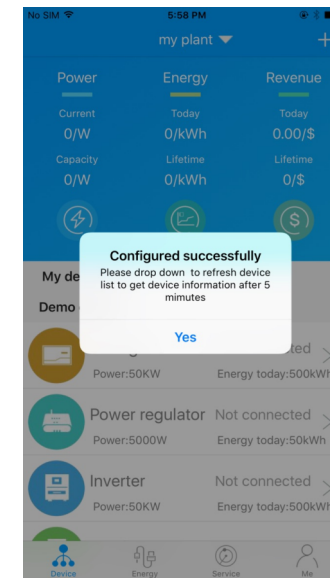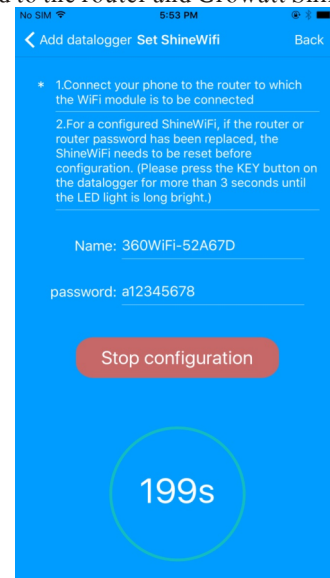


7. If the pop up a message says "Failed", please refer to Appendix A of the troubleshooting guide to solve the problem. After that, login to your account and click the "+" sign on the right top side of the page, and select "Datalogger list" in the appearing dialog window. Push on the datalogger's serial number for 3 sec, until a small dialog window appears, select "Configure datalogger". It will move to the "Set ShineWiFi" page, enter the home routers name and password, then click, "Set" the connection configuration process will begin.

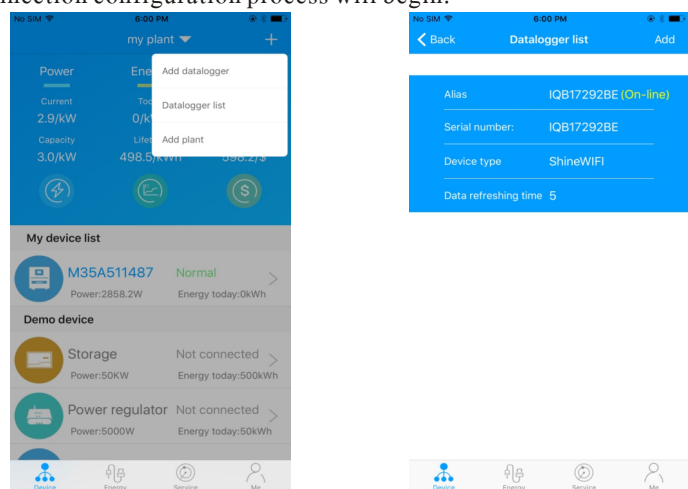

8. After successful configuration, it will move to the "my plant" page, select the inverter in the device list to check the inverter update information.

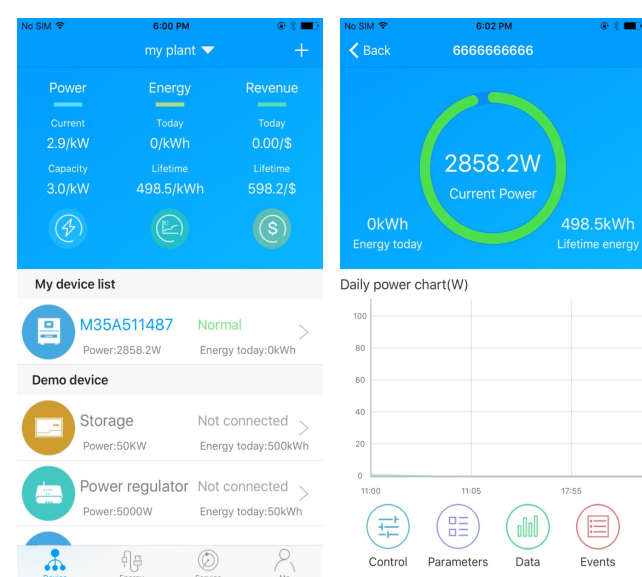

9. If you want to add/edit/delete/configure a datalogger, click the "+" sign on the right top side of the "my plant" page. There are 4 options in the dialog window when push on the datalogger's serial number, click the one you need.
  - 1) "Add datalogger" is for adding a new ShineWiFi module to this account.
  - 2) "Edit datalogger" is used to assign an alias name for your ShineWiFi module.
  - 3) "Delete datalogger" is used to remove the ShineWiFi module from this account.
  - 4) "Configure datalogger" is used for configuring the connection of the ShineWiFi module to the router.

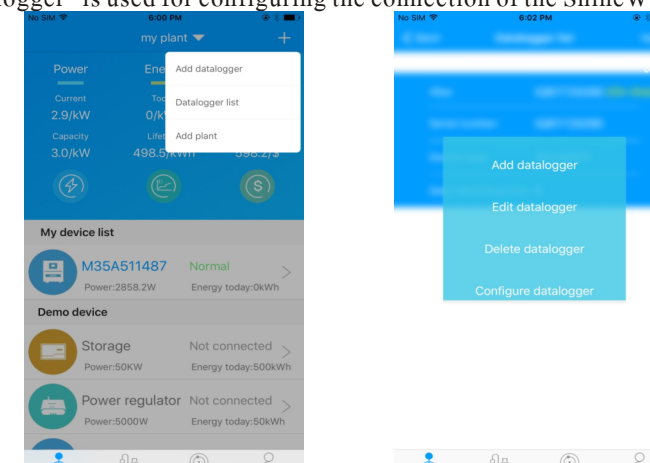

### Step4. Reset ShineWiFi to Factory Settings

When you have changed your home router password, or changed to a new router, you need to reset ShineWiFi to factory settings and reconfigure it. Remove the rubber plug, and press the KEY button for 6 sec, until all three LEDs long light up, then login to your ShinePhone account, click the "+" on right top of this page, long press this datalogger serial number to reconfigure.

#### Appendix A: ShineWiFi KEY Button Description

Operation	Description
When ShineWiFi is powered on, remove the rubber plug, and press the KEY button. (ShineWiFi LED will change from flash to always ON)	ShineWiFi will enter to AP mode. AP mode is a debug mode, only allowed for professional
When ShineWiFi in AP mode, press The KEY button of ShineWiFi (ShineWiFi LED will change from always ON to flash)	Quit AP mode
Long press the KEY button for More than 6 sec (ShineWiFi All LEDs always ON)	Reset ShineWiFi to Factory settings

### Troubleshooting

LED State	Indicate	Troubleshooting
All three LEDs are dark	ShineWiFi can not find inverter via WiFi/GPRS port	1. Check if the DIP switch beside inverters WiFi/GPRS port is switched DIP1 to "ON"
After configuration, only Red LED flashes	ShineWiFi can't connect to the home router	(1) Check router information a) Router name should consist of English letters and numbers, it does not support special symbols b) For safety reason, please use encrypted wireless network c) It does not support public network that use secondary authentication (2) Check if you filled in the correct name and password of the home router when configuring it
After configuration, Only Green LED flashes	ShineWiFi already connected to the home router, but not connected To waet ShineServer	(1) Check if home router is connected to the internet (2) Check if the router firewall allows to select port 5279 and 5280
After configuration, Only Blue LED flashes	ShineWiFi communication OK with inverter, home router, and waet ShineServer	Normal working state
Red LED always ON	ShineWiFi module error	Need to replace with a new ShineWiFi
Green LED always ON	ShineWiFi module in switching mode	No response if you press the KEY button during this period
Blue LED always ON	ShineWiFi module is in AP mode	Debug mode, short press the KEY button to quit